


Oz Rail™

Protective guardrail system

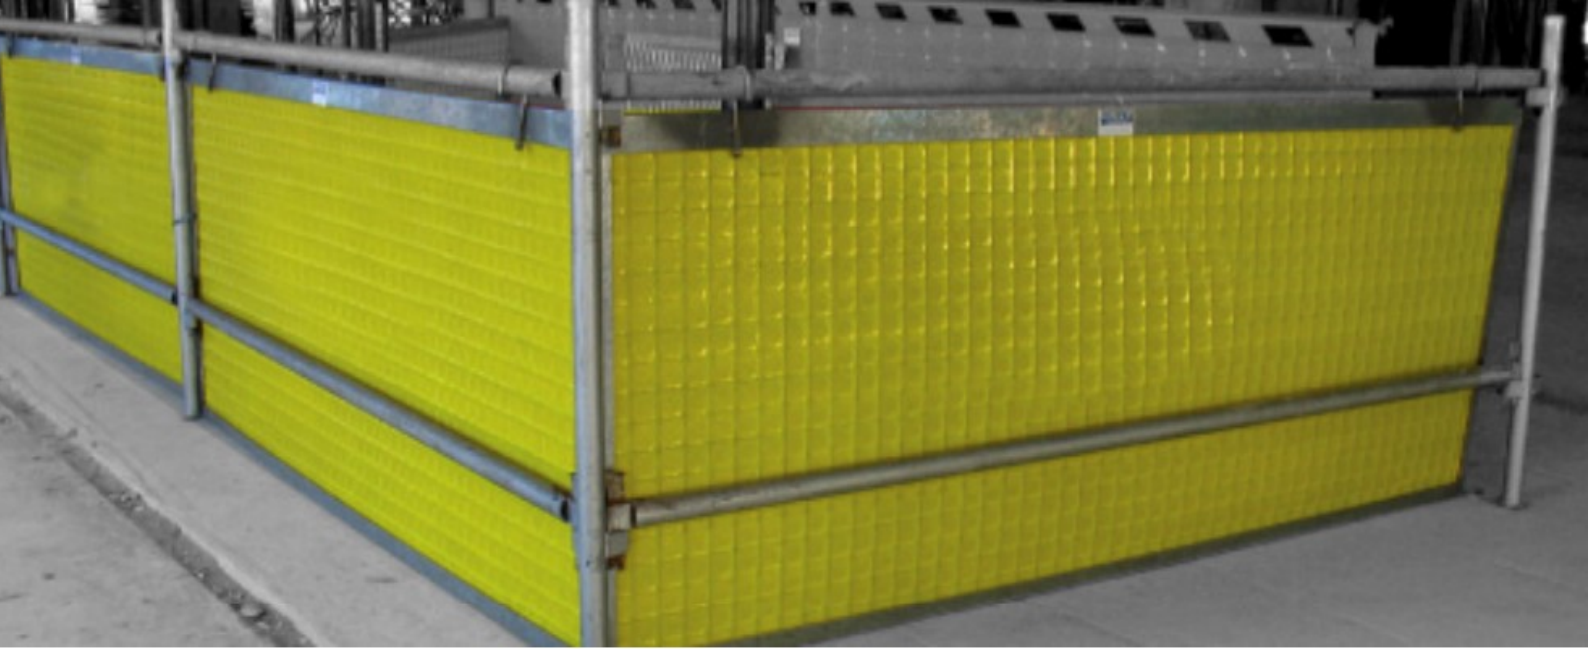

Why use Oz Rail™?

The robust rail system provides superior edge protection and perimeter containment screening.

Available sizes

The following sizes are available to suit standard systems.

Nominal (mm)	Height (mm)
700	1010
1200	1010
1800	1010
2400	1010

Features and benefits

- Light weight post with 4 – only connections so that the post can be utilised for system purposes only. (The post has either/ or 3, 4 and 6 hole designed fixing plate at base.)
- Specialized corner base plate with optional 45° and 90° angles available
- System creates “flat” finish with no protruding parts
- Designed to be quick and easy to install and dismantle
- Guards available in either polyethylene wrapped mesh (standard) or non wrapped 25 x 50mm (specials)
- Designed and tested in accordance with AS1657- 1992


Oz Rail™

Simple installation

1. Stand posts and connect selected length ledger to bottom "V" coupling
2. Attach post to substrate via appropriate fixing; the base plates have several anchoring points (See notes.)
3. Connect top ledger into place
4. Place selected length Oz Guard panel onto top ledger via connecting hooks
5. Restrain the bottom corner of panels to adjacent post or panel. (The Zip Tie used should have a breaking strain greater than 60 kg, we recommend CT550B.)

Note: The hole in the base plate is 13 mm in diameter; we however cannot recommend a fixing for your site as conditions can vary greatly depending on the strength of the substrate and the distance from perimeter and depth of fixing.

We recommend that you contact your site engineer for verification regarding the correct fixing bolt / anchor to use on your substrate.

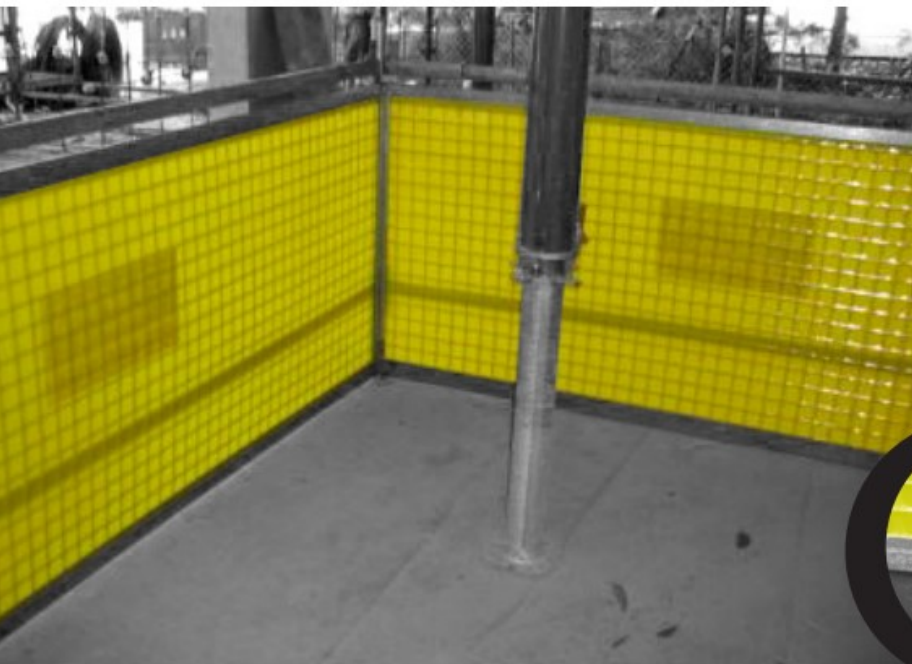

Oz Rail™ ensures there is no room for debris to escape

FOR INQUIRIES CONTACT:

sales@dansea.com.au

Or Wrightstone Trading +61 7 3823 4405

33 Veronica St

Capalaba QLD 4214, Australia

