


Oz Guard®

Protective screen system for scaffolding

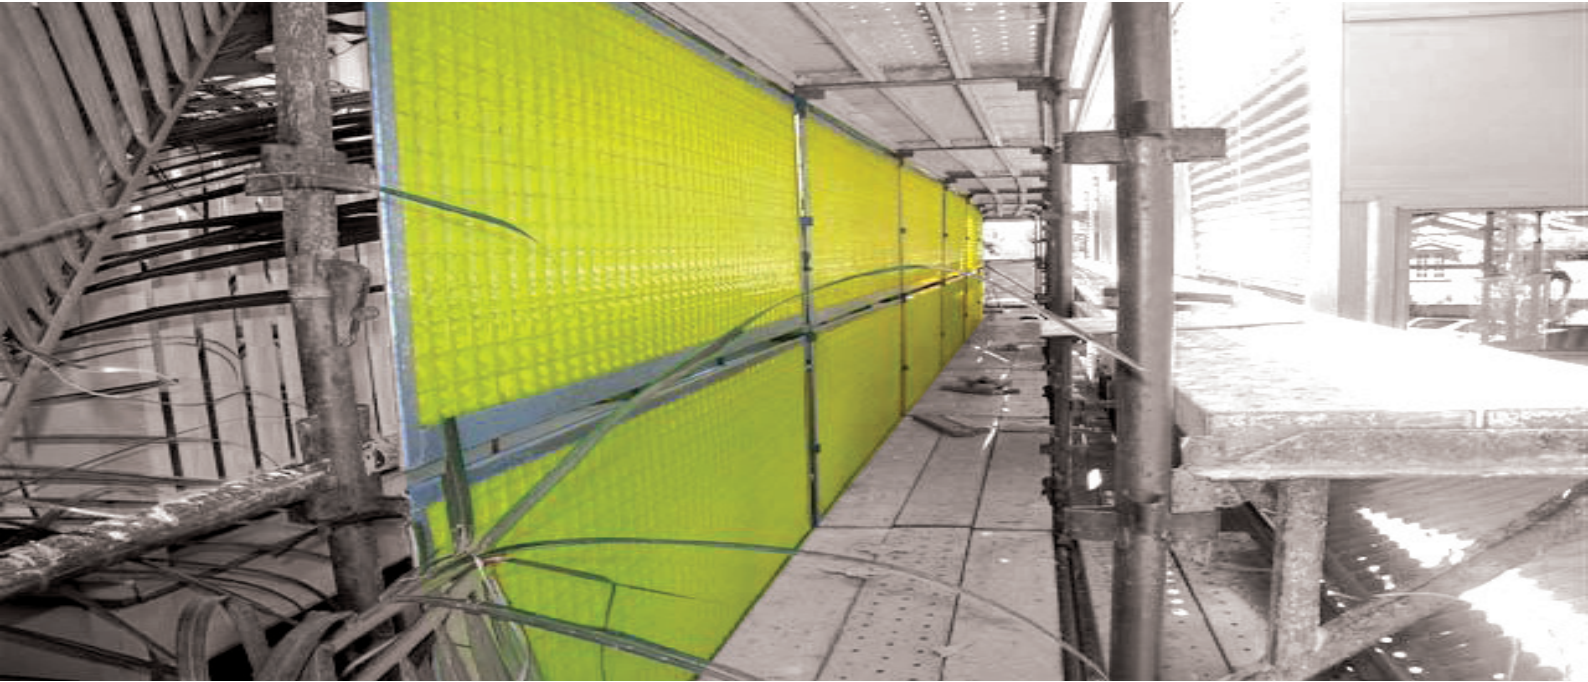

Oz Guard® to protect residential premises near your work site

Why use Oz Guard®?

The robust panel system provides superior edge protection and perimeter containment screening for your scaffolding.

Available sizes


The following sizes are available to suit standard scaffolding systems.

Nominal mm	Length mm	Height mm	Weight kg
750	752	950	5.9
1150	1152	950	8.5
1750	1752	950	12
2350	2352	950	15.2

Features and benefits

- Robust galvanised 1.6 mm steel frame
- Bolted top rail
- Captive hook assembly
- Galvanised 3.3 mm diameter 50 x 50 mm steel mesh
- Double thickness shrink wrap poly both sides
- UV stabilised polyethylene
- Welded bottom rail

Simple installation

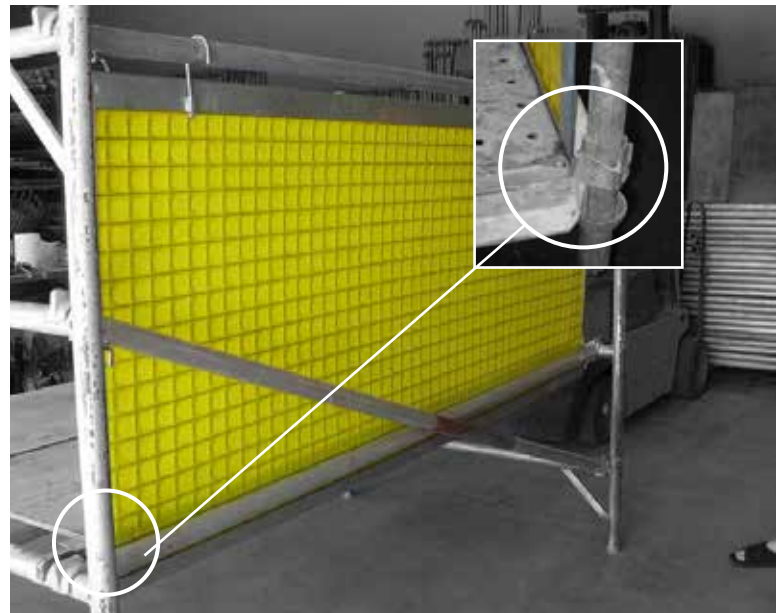


1. Hook Oz Guard® over top rail
2. Wedge the bottom rail between the ledger and plank

When using two or more panels per level, you can easily secure the bottom edges of the upper panels to the stanchions by wire ties or nylon cable ties.

Oz Guard®

Protective screen system for scaffolding

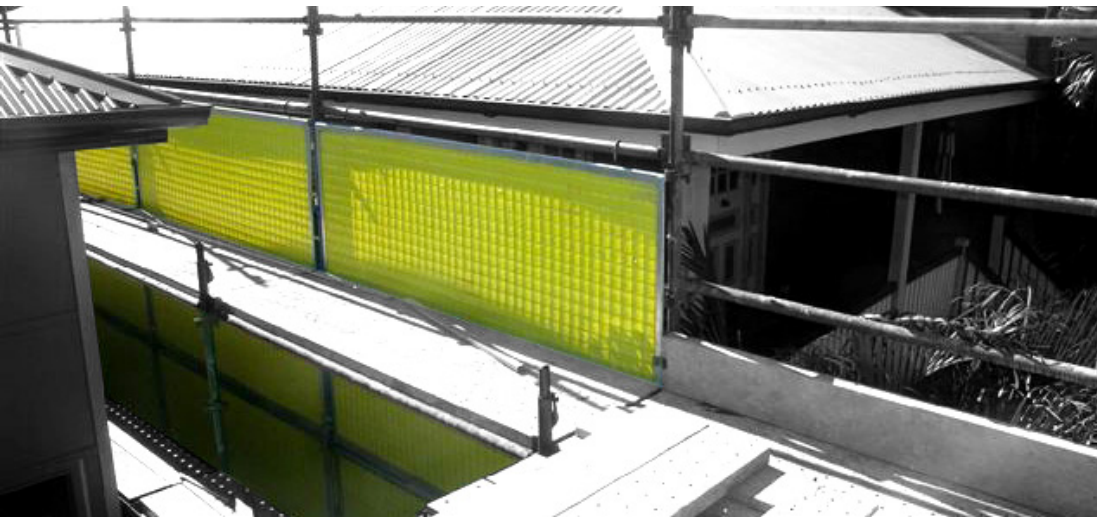

Oz Guard® to protect commercial and residential projects



Oz Guard® for high rise buildings – can easily be adapted for each stage of your project



Oz Guard® to protect bridge workers

For enquiries call:
LESTER UNDERWOOD: 0423 739 313

